


SHOCK ABSORBER

Compression/Rebound Adjustment

MX Z (Renegade X, X)

Front shock on the above mentioned models feature a compression/rebound adjustment.

Turn the damping adjuster accordingly. Turning it clockwise increases shock damping action (stiffer).

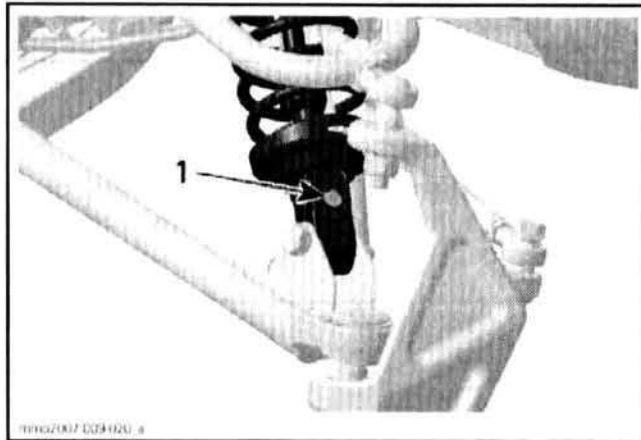

TYPICAL
1. Damping adjuster

PROCEDURES

SHOCK ABSORBER

Shock Absorber Removal

Refer to *BODY* subsection to remove the following:


- Hood
- Side panel(s).

Remove the air intake silencer. Refer to *AIR INTAKE SYSTEM* subsection.


Remove the muffler. Refer to *EXHAUST SYSTEM* subsection.

Lift the front of vehicle until skis are off the ground.

Remove bolts securing shock absorber to frame and lower suspension arm.

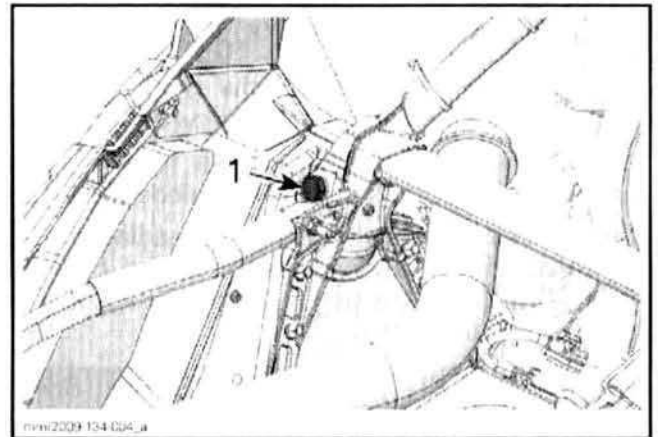

1. RH shock absorber upper bolt

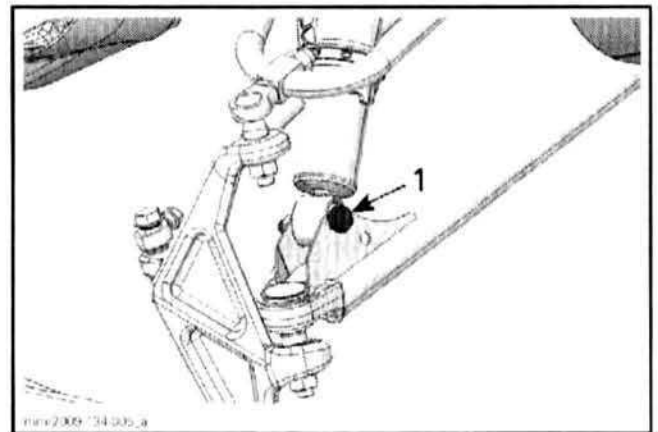

1. Shock absorber lower bolt


Remove the shock absorber.

Shock Absorber Disassembly

To remove spring from the shock absorber, use the *SPRING REMOVER* (P/N 529 036 007).



Place the tool in a vise.

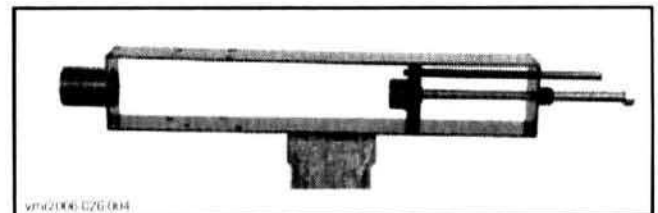

On models with a screw type adjuster, unscrew the adjuster completely.

Position the shock absorber in the tool and install the spring compressor pins.